



FLUID CONTROLS[®]
ENGINEERING CONNECTIONS EVERYDAY

An approved "In-house R&D Centre"
Dept. of Scientific and Industrial
Research (DSIR), Government of India

Letter Ref: FCPL/URJIKA/17072023

Date: 17-July-2023

Urjika Consulting & Engineering Solutions Pvt Ltd
K 190, Sector 41,
South City-1 Gurugram,
Haryana 122001
India

Kind Attn: Mr. Anupam Sonkar- Founder & COO

Sub: Marketing Partner of Fluid Controls CNG Products

Dear Sir,

We hereby authorize Urjika Consulting & Engineering Solutions Pvt Ltd, K 190, Sector 41, South City-1 Gurugram, Haryana 122001 India, as our Authorised Marketing Partner of Fluid Controls CNG Products

This authorisation covers sales for the brands manufactured by us viz. "Fluid Controls" and "Hyd-Air" and also covers all products manufactured by us.

The validity period of our authorisation to Urjika Consulting & Engineering Solutions Pvt. Ltd. is from 01-August-2023 to 31-March-2024.

Thanking you

Yours faithfully

For **Fluid Controls Private Limited**


Dr. Tansen Chaudhari
Chief Executive Officer



FLUID CONTROLS PRIVATE LIMITED

Corporate Office: 5th Floor, The International, 16 Maharshi Karve Road, New Marine Lines, Mumbai 400 020, INDIA

Registered Office: J.V. Patel ITI Compound, B. Madhurkar Marg, Mumbai 400 013, INDIA


Tel.: +91-22-6823 8000 | Fax: +91-22-6823 8001 | sales@fluidcontrols.com | www.fluidcontrols.com

GST: 27AAACF4459R1ZZ | CIN: U29120MH1981PTC025745



ENGINEERING FLOW CONTROL

Fittings, Valves, Manifolds, Clamps,
Customised Hookups & Accessories

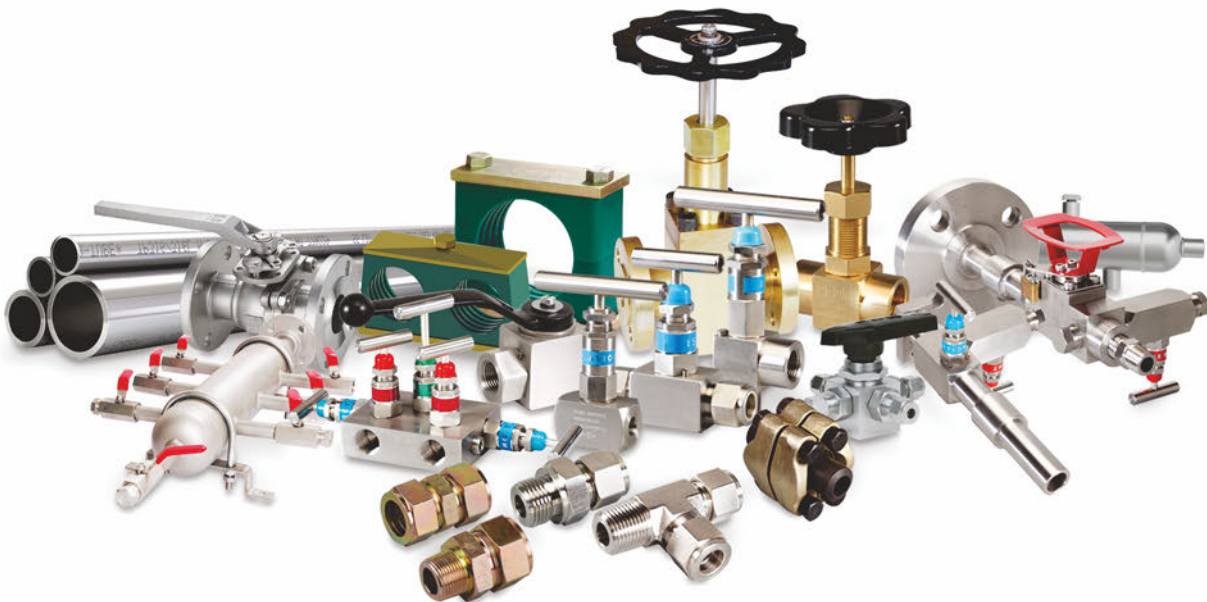



OUR COMPANY

Established in 1974, Fluid Controls® is a leading provider of instrumentation products and services for a wide variety of industrial applications. Headquartered in Mumbai, the group has manufacturing facilities in Pune and Goa, including a state-of-the-art R&D centre and testing laboratory.

OUR CLIENTS

Fluid Controls® is a premier supplier to onshore and off-shore oil and gas installations, process and power plants and railways in India. We are approved by all leading OEM's, including ONGC (offshore/ onshore), NTPC, NPCIL, BHEL, GAIL, SAIL, and RINL. Fluid Controls® has over 25 years of expertise in overseas sales to clients in North America, Europe, the Middle East and South East Asia.

OUR PRODUCTS

Fluid Controls® offers clients a complete range of instrumentation erection hardware, from tube fittings, valves, manifolds and air headers to DIN pipe clamps, SAE flanges and condensate pots. We also offer clients customised close coupled instrument hook-ups, high pressure 30,000psi needle valves, a range of gas valves for turbine applications and block and bleed valves.



OUR RESEARCH & DEVELOPMENT

Fluid Controls® offers clients customized solutions based on analytical formulations, 2D and 3D Modelling and Finite Element Analysis. Our commitment to product upgradation and new product development has resulted in the recognition of Fluid Controls® as an “R&D Centre” by the Department of Scientific & Industrial Research (DSIR).

OUR CERTIFICATIONS

Fluid Controls® is systems certified for ISO 9001:2015, ISO 14001, ISO 18001, and PED. Product performance certifications include ASTM F1387-99 (2012), ISO 19879 (ISO 8434), NGV, ISO 15500, ECE R110, PDA for DIN Single Ferrule Fittings, American Bureau of Shipping PDA for Fittings, Valves and Manifolds, MSS-SP-99, Valve certifications for API 607 and Fugitive Emission. We also have special certifications to IEC and EN standards for corrosion and shock/vibration for fittings.

OUR SERVICES

Fluid Controls® offers product customization and solutions to suit specific applications and client requirements. Our DSIR recognised R&D Center offers design and testing services to all our customers. We also provide on-site installation support and training programs when required.





FLUID CONTROLS[®]

ENGINEERING FLOW CONTROL




INSTRUMENTATION TUBE FITTINGS ▶

- Range of Double Ferrule Compression Tube Fittings
- PDA by American Bureau of Shipping (ABS)
- Performance tested to ASTM F1387-99 (2012). Comply with vibration norms of BS EN 61373 and corrosion resistance of IEC 60068-2-52
- Certified for CNG applications (NGV 3.1, ECE R110, ISO 15500)
- Working pressures as per ASME B31.3, performance temperatures to 350°C
- End connections and materials to customer requirements, sizes up to 2 inches
- Heat code traceability



DIN SINGLE FERRULE FITTINGS ▶

- Design standard DIN 2353 / ISO 8434-1 Offered in Light, Medium and Heavy Series
- Performance certified as per ISO 19879 / ISO 8434-5
- Cyclic Endurance, Fire Endurance, Pull Out Tested to IACS P211:2001, Salt Mist Test performance to ISO 9227
- Unique hardening process for the ferrule developed in house
- End connections as per customer requirements
- Available in stainless steel. Carbon steel provided on request
- Heat code traceability

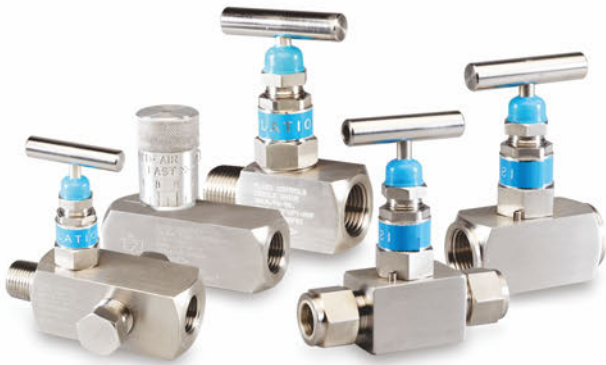

NEEDLE VALVES ▶

- A wide variety of designs including two-way, three-way, multi-port, block & bleed
- Specially designed, adapted and certified low temperature valves offering safe, efficient service for temperatures to -196°C (-320°F)
- Needle Valve PDA by American Bureau of Shipping (ABS).
- Certified MSS-SP-99, Fugitive Emission Certification as per API 622 / ISO 15848
- Certified for CNG applications (NGV3.1, ECE R110, ISO15500)
- IBR certification offered
- Working pressures up to 15,000 psig (1034 bar)
- Case hardened non-rotating swiveling plug or ball and thread above the seal design
- End connections and valve material to customer requirements
- Heat code traceability



CLEAN FITTINGS ▶

- Clean fittings conforming to ASTM G93 level C
- Stainless steel
- Sizes and end connections as per customer requirements
- Heat code traceability




INSTRUMENTATION MANIFOLDS ▶

- Two, Three and Five Valve Manifolds
- Separately mounted, direct mounted (T Type, H Type), co-planar and flanged configurations
- Working pressures up to 10,000 psig (689 bar)
- IBR certification offered
- Case hardened non-rotating swiveling plug / ball and thread above the seal design
- End connections and material to customer requirements
- Heat code traceability



HIGH PRESSURE NEEDLE VALVES ▶

- Specially designed range of valves designed for pressures up to 30,000 psig (2,112 bar)
- Case hardened non-rotating swiveling plug / ball and thread above the seal design
- End connections to customer requirements.
- Valves offered in stainless steel / nickel alloys
- Heat code traceability

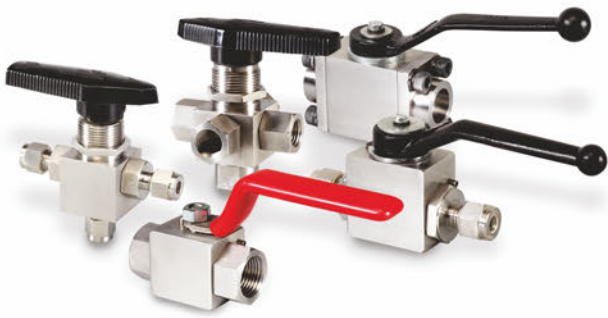

BALL VALVES ▶

- Standard Two, Three and Four-Way designs
- Switching service ball valves offered in a compact design
- PDA by American Bureau of Shipping (ABS). Fire Safe Certification as per API 607 / ISO 10497
- Certified for CNG applications (NGV 3.1, ECE R110, ISO 15500)
- Special range of flanged end ball valves offered for hydraulic service
- Working pressures up to 10,000 psig (689 bar)
- End connections and material to customer requirements
- Heat code traceability



PRE-FABRICATED INSTRUMENT HOOKUPS ▶

- EIL approved Prefabricated Instrument Hookups
- Each Hookup is custom designed for the customer / application requirement for temperature, flow, pressure and working conditions
- 3D and PDMS/PDS modelling to facilitate alignment with the plant layout
- Complete traceability based compliance to quality control documents
- Simplified packaging per TAG numbers.
- On-site assistance during installation



NON RETURN VALVES ▶

- PDA by American Bureau of Shipping (ABS)
- Offered a variety of designs with screwed and tube end connections
- Standard cracking pressure 0.3-0.5 kg/cm²
- Cracking pressure up to 2kg/cm² offered for special applications
- Working pressures up to 6,000psig (414 bar)
- Valve materials to customer requirements
- Heat code traceability



GAS VALVES ▶

- A range of special valves designed for :
 - Hydrogen cooling system of turbo generator
 - Valve for the super-heated steam line including special manifolds
 - Valves for heat exchangers in condensate lines
 - Valves used for cooling towers
- Globe Valves offered up to NB 150
- Helium leak testing per customer requirements
- Heat code traceability



FLOATING BALL VALVES ▶

- Design to BS EN ISO 17292 / API 6D
- Available in two-piece or three-piece design with Butt-weld, Socket-weld, NPT end connections
- Fire safe design with Chevron sealing for a leak-tight stem
- Blow-out proof and self-compensating stem design
- Heat code traceability



PIPE AND TUBE CLAMPS ▶

- Standard Duty construction as per DIN 3015 - 1 up to 2 1/2" or 63mm OD
- Heavy Duty Construction as per DIN 3015 - 2 up to 8" or 219mm OD
- A special range of twin clamps as per DIN 3015 - 3 up to 42mm OD
- Available in polypropylene, polyamide and aluminum with CS / SS metallic parts
- Channel mounting options available



SAE & CETOP FLANGES ▶

- SAE Flanges designed as per ISO 6162
 - Working pressures of 3000psig (207 bar) and 6000psig (414 bar)
 - Butt weld and socket weld connections
- CETOP Flanges designed as per ISO 6164
 - Dynamic working pressures of 2272psig (160 bar) and 4,473 (315 bar)
 - Butt weld and socket weld end connections with square clamping



INSTALLATION ACCESSORIES ▶

- Tools to ensure leak-free joints
- Indigenously developed Hydraulic Swaging Machine for installation of double ferrule fittings
- Pre-setting tools, gap gauges and lubricant to aid installation of fittings
- Tube cutters, benders and de-burring tools



FLUID CONTROLS PRIVATE LIMITED

📍 CORPORATE OFFICE: J.V.Patel I.T.I Compound, B. Madhurkar Marg, Mumbai 400 013, Maharashtra, INDIA

☎ Tel.: +91-22-43338000 | Fax: +91-22-43338001

🌐 Website: www.fluidcontrols.com ✉ Email : sales@fluidcontrols.com



CNG/LNG ALTERNATE FUEL SYSTEM PRODUCTS

With over four decades of experience, Fluid Controls[®] offers high performance instrumentation Connectors, Valves, and Hose Assemblies for CNG/LNG/Alternate Fuel Systems. We provide comprehensive engineering solution from design & engineering to prototyping, manufacturing and onsite installation services. Our Alternate Fuel System products provide leak-proof, torque-free seals for connections, eliminate hazardous leaks and ensure high performance reliability.

CERTIFICATIONS

Compliant to NGV 3.1, ECE R110, ANSI NGV 3.1-2014/CSA 12.3-2014, and ISO 15500.

TESTING

Fluid Controls[®] has been granted NABL (National Accreditation Board for Testing and Calibration Laboratories) Certification in accordance with ISO/IEC 17025:2017. The accreditation covers the Fluid Controls Performance Testing Laboratory and Metrology Laboratory.

APPLICATIONS

Compressed Natural Gas (CNG) Applications for Vehicles & Fueling Stations
City Gas Distribution (CGD) Applications

ALTERNATE FUEL SYSTEM PRODUCTS

DOUBLE FERRULE CONNECTORS

- Proven Design for Leak-proof Connections
- High Vibration Resistance
- Dry Film Lubrication on nut provides anti-galling/seize affect & reduces friction between nut and body threads

Application: For Fueling/Defueling Vehicles

Size Range: 1/16"/3MM to 2"/42MM Design

Temperature Rating: -65°F to 450°F (-54°C to 232°C)

Material: Stainless Steel, Carbon steel with Zinc-Ni plating



SINGLE FERRULE CONNECTORS

- Single Ferrule Tube Fittings with "Duplex" Case Hardened Ferrule Design
- Leak-proof Connections
- High Vibration Resistance
- Dry Film Lubrication on Nut for anti-galling/seize affect & for friction reduction between the nut and body threads

Application: For Fueling/Defueling Vehicles

Size Range: 1/4"/6MM to 2"/42MM Design

Temperature Rating: -65°F to 450°F (-54°C to 232°C)

Material: Stainless Steel



ALTERNATE FUEL SYSTEM PRODUCTS

TRUNNION MOUNTING BALL VALVES

- High-pressure Natural Gas Application Valve
- Easy to Operate
- Light Weight
- Low Torque Operation
- Trunnion mounting seat bearings act against seizure and increase valve life

Type: 2-Way/3-Way

Pressures: 6000 psig (414 Bar) / 10,000 psig (689 bar)

Application: For Fueling/Defueling Vehicles

Temperature Rating: -65°F to 400°F (-54°C to 204°C)

Material: Stainless Steel

End connections: Single Ferrule/Double Ferrule/NPT

Thru Bore Size: 1/8" -1/2"



FLOATING BALL VALVES

- Medium-pressure Natural Gas Application Valve
- Easy to Operate
- Provide Low Torque Operation
- ¼ Turn Operation ON-OFF

Type: 2-Way/3-Way

Pressures: 1500 psig (103 Bar) to 6,000 psig (414 bar)

Application: For Fueling/Defueling Vehicles

Seat Material: PTFE/PEEK

Temperature Rating: -65°F to 450°F (-54°C to 232°C)

Material: Stainless Steel, Brass

End Connections: Single Ferrule/Double Ferrule/NPT

Thru Bore Size: 1/16" -1/2" (6mm to 12mm)



NON-RETURN VALVE

Unidirectional Flow Control Valves for Low & High Pressure Natural Gas application

Pressures: 1500 psig (103 Bar) to 6,000 psig (414 bar)

Application: For Fueling/Defueling Vehicles

Temperature Rating: -65°F to 450°F (-54°C to 232°C)

Material: Stainless Steel

End Connections: Single Ferrule/Double Ferrule/NPT



RECEPTACLES

Medium & High Flow capacity to rapidly fill larger fuel tanks

Flow: 5000 CFM

Pressure: 3000 (208 Bar)

Application: For Fueling

Temperature Rating: -40°F to 250°F (-40°C to 121°C)

Material: Stainless Steel

End Connections: Single Ferrule/Double Ferrule/NPT



+91-22-68238000

sales@fluidcontrols.com

fluidcontrols.com